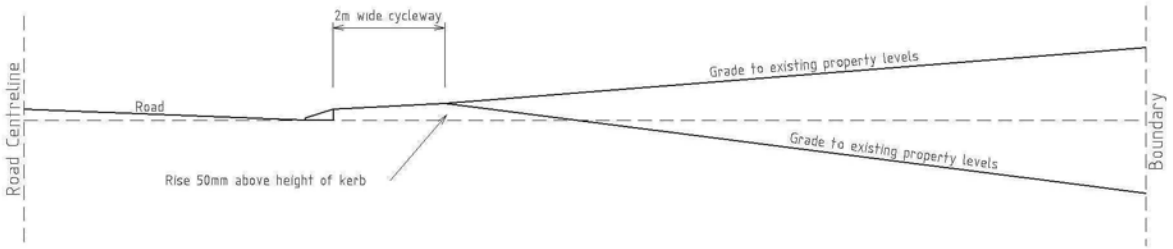

CROSSOVER SPECIFICATIONS FOR MOUNTABLE KERBED ROADS

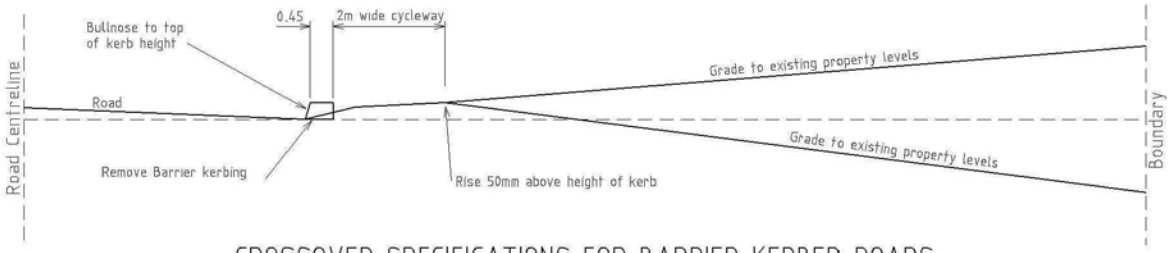

CROSSOVER SPECIFICATIONS FOR BARRIER KERBED ROADS

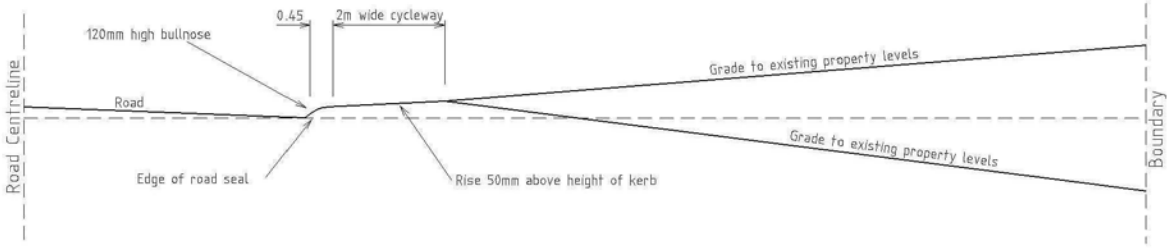

CROSSOVER SPECIFICATIONS FOR UNKERBED ROADS

NOTES

1. 12mm EXPANSION JOINTS TO BE PROVIDED AS SHOWN. A 12mm THICK POLYETHYLENE FOAM PACKER SHALL BE POSITIONED IN EACH EXPANSION JOINT.
2. 5mm CONTRACTION JOINTS TO BE PROVIDED AT A MAXIMUM SPACING OF 1.50m.
3. WHERE MOUNTABLE KERB EXISTS A 12mm EXPANSION JOINT IS TO BE PROVIDED BETWEEN THE BACK OF KERB AND THE CROSSOVER.
4. CONCRETE CROSSOVER TO HAVE A BROOM FINISH WITH JOINTS AND EDGES HIGHLIGHTED. MOUNTABLE KERB TO HAVE SMOOTH FINISH.
5. ALL MEASUREMENTS IN MILLIMETRES.
6. SHOULD ANY POWER POLE, SIGN, PIT, MANHOLE OR ANY OTHER OBSTRUCTION BE LOCATED ON THE PROPOSED ALIGNMENT OF THE CROSSING THE APPLICANT SHALL BE LIABLE FOR THE COSTS ASSOCIATED WITH THE REMOVAL OR ALTERATION OF SAME
7. TRENCH GRATING SHALL BE CONSTRUCTED BY THE APPLICANT IF CONSIDERED NECESSARY TO CUT OFF WATER ENTERING THE PROPERTY, OR ENTERING THE ROAD FROM INTERNAL DRIVEWAYS.
8. VEHICLE CROSSINGS ABUTTING BROCKMAN HIGHWAY, BUSSELL HIGHWAY AND CAVES ROAD SHALL BE SUBJECT TO APPROVAL OF COUNCIL AND M.R W.A.
9. WHERE THE EXISTING CONCRETE FOOTPATH/DUAL USE PATH IS ONLY 75mmTHICK IT MUST BE REMOVED FROM THE AREA TO BE REPLACED BY THE CROSSOVER AND REINSTATED AT 100mm THICK CONCRETE. AN EXPANSION JOINT IS TO BE PLACED AT EACH INTERFACE BETWEEN THE FOOTPATH AND CROSSOVER.

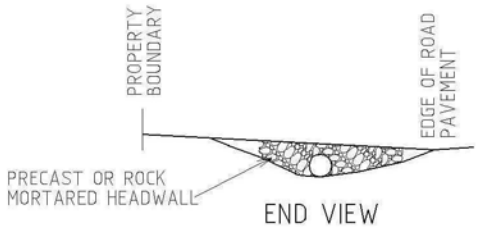

END VIEW

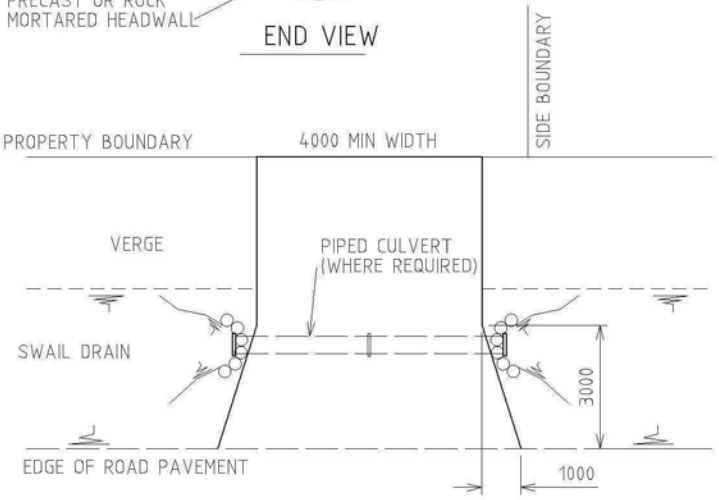

RURAL CROSSOVER

NUMBER	DATE	REVISION

DESIGNED	.	DESIGN PRELIMINARY UNLESS SIGNED	
DRAWN	JLS		
SURVEY	.	DATE	12/01
CHECKED	.	FILE LOC.	

SHIRE OF AUGUSTA-MARGARET RIVER
PO BOX 31
TOWN VIEW TERRACE
MARGARET RIVER
PH. (08) 9780 5255
FAX. (08) 9757 2512

STANDARD CROSSOVER DETAILS SHEET 2

SCALE	ORIGINAL	DWG No.	REV No.
N.T.S.	A1	DRIVEWAY 2/2	